


Bus short-circuit isolator module

Code: JA-110T

The JA-110T bus isolator is designed to electrically separate and protect vulnerable parts of the bus . It is powered by the bus. It can be installed in a JA-190PL box.

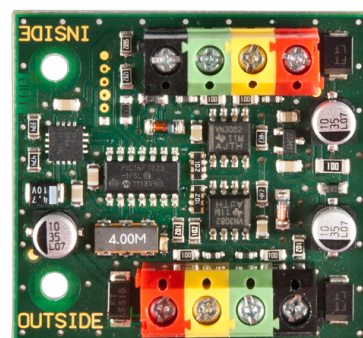

Product description:

The unit not addressable (no alarm system position needed).

Technical information:

Power	from control panel digital bus 12 V (9 ... 15 V)
Current consumption in standby mode	5 mA
Current consumption for cable selection	5 mA
Maximum allowed current in the outer bus branch	max 250 mA
Classification	Grade II according to EN 50131-1, EN 50131-3,
Operational environment according to EN 50131-1	II.Indoor general
Operating temperature range	-10 °C to 40 °C
Also complies with	EN 50130-4, EN 55022